


# Ducting

---



### Neo-Duct Neoprene Ducting Hose

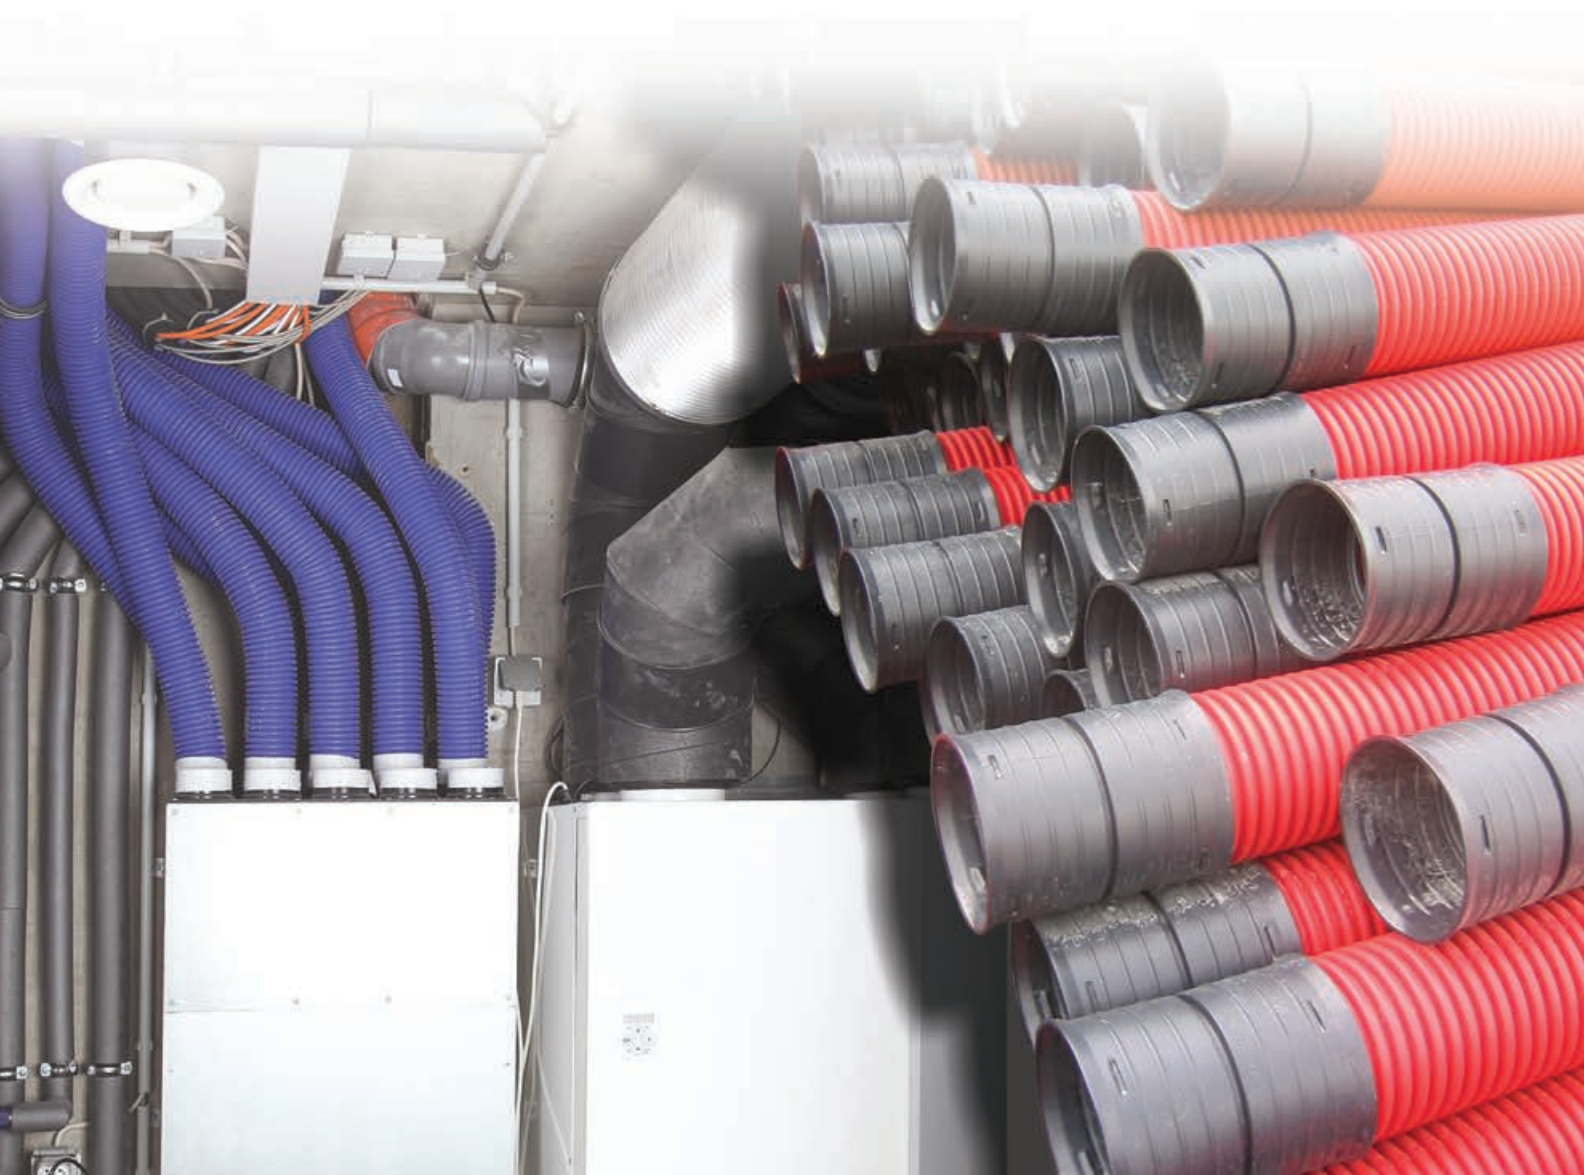

Neoprene-coated two-ply polyester ducting for dust collection, air movement, fume control and light material handling. Standard lengths of ducting supplied with plain ends. Cuffs available upon request. Cuffs are approximately 6" in length. Double-ply construction - works extremely well in both positive and negative pressure applications . . . offers extreme flexibility and compressibility, combined with excellent crush-resistance and tensile strength. Recommended for all air handling applications, dust and fume control and light material handling. Black neoprene coating with polyester fabric construction - provides excellent flexibility . . . will not rot. Manufactured to meet UL94V-O rating. Standard packaging: 25' lengths in cartons.

Item #	Nominal I.D.	Min. Bend Radius	Weight
HTNP2-150X25	1 1/2 in 38.1 mm	2.6 in 66 mm	.16 lb/ft
HTNP2-200X25	2 in 50.8 mm	3.5 in 88.9 mm	.22 lb/ft

Item #	Nominal I.D.	Min. Bend Radius	Weight
HTNP2-250X25	2 1/2 in 63.5 mm	4.0 in 101.6 mm	.28 lb/ft
HTNP2-300X25	3 in 76.2 mm	5.0 in 127.0 mm	.33 lb/ft
HTNP2-350X25	3 1/2 in 88.9 mm	5.7 in 144.8 mm	.48 lb/ft
HTNP2-400X25	4 in 101.6 mm	6.5 in 165.1 mm	.48 lb/ft
HTNP2-500X25	5 in 127.0 mm	7.5 in 190.5 mm	.61 lb/ft
HTNP2-600X25	6 in 152.4 mm	9.0 in 228.6 mm	.70 lb/ft
HTNP2-700X25	7 in 177.8 mm	9.5 in 241.3 mm	.92 lb/ft
HTNP2-800X25	8 in 203.2 mm	10.0 in 254.0 mm	1.04 lb/ft
HTNP-1000X25	10 in 254.0 mm	11.0 in 279.4 mm	1.36 lb/ft
HTNP2-1200X25	12 in 304.8 mm	13.5 in 342.9 mm	1.85 lb/ft
HTNP2-1400X25	14 in 355.6 mm	15.5 in 393.7 mm	2.10 lb/ft
HTNP2-1600X25	16 in 406.4 mm	18.5 in 469.9 mm	2.40 lb/ft
HTNP2-1800X25	18 in 457.2 mm	22.0 in 558.8 mm	2.70 lb/ft
HTNP2-2000X25	20 in 508.0 mm	24.0 in 609.6 mm	3.0 lb/ft

### Sil-Duct Series SDH Silicone Ducting Hose



Two-ply smooth silicone-coated polyester fabric hose with helically-wound spring steel wire for flexibility. Double continuous-filament, silicone-coated fiberglass cord for durability. Service Temperature Range -80 to +600 °F -62 to +316 °C

Item #	Nominal I.D.	Wall Thickness	P.S.I.G	Burst Pressure	Max. Neg. PSI	Max Leakage CFM	Cuff Length	Weight per ft.	Length/CTN
SDH-100X12	1 in	.070 in	60	180 psi	15 psi	.015	1-1/2"	2.0 oz	12'
SDH-125X12	1 1/4 in	.070 in	60	180 psi	15 psi	.015	1-1/2"	2.5 oz	12'
SDH-150X12	1 1/2 in	.070 in	55	165 psi	13 psi	.015	1-1/2"	3.0 oz	12'
SDH-175X12	1 3/4 in	.070 in	55	165 psi	13 psi	.020	1-1/2"	3.5 oz	12'
SDH-200X12	2 in	.070 in	50	150 psi	10 psi	.020	1-1/2"	4.0 oz	12'
SDH-250X12	2 1/2 in	.070 in	45	135 psi	8 psi	.025	1-1/2"	5.0 oz	12'
SDH-300X12	3 in	.070 in	45	135 psi	7 psi	.030	1-1/2"	6.2 oz	12'
SDH-400X12	4 in	.080 in	40	120 psi	5 psi	.040	1-1/2"	8.4 oz	12'
SDH-500X12	5 in	.080 in	35	105 psi	4 psi	.060	2"	10.7 oz	12'
SDH-600X12	6 in	.090 in	30	90 psi	3 psi	.100	2"	13.0 oz	12'
SDH-800X12	8 in	.110 in	15	45 psi	3 psi	.150	2"	17.8 oz	12'



OH: 800-344-0150  
GA: 888-492-2140

FAX: 937-454-2086  
FAX: 770-428-0717