

2-Ply Sandblast Hose



Application

- Designed to convey abrasive sand and shot blast material.

Cover

- Black conductive SBR/NR blend-abrasion and ozone resistant-pin pricked.

Reinforcement


- High tensile textile cords - 2-ply construction.

Tube

- Static conducting natural rubber, offering excellent abrasion resistance.
- Tolerances according to RMA Class 311-A.

Item #	Nominal I.D.	Nominal O.D.	Tube Thickness	Working Pressure	Temperature Range
LT753AA050	1/2 in 13 mm	1.06 in 27 mm	0.212	150 psi 10 bar	-22 to 176 °F
LT753AA125	1 1/4 in 32 mm	1.89 in 48 mm	0.240	150 psi 10 bar	-22 to 176 °F

4-Ply Sandblast Hose

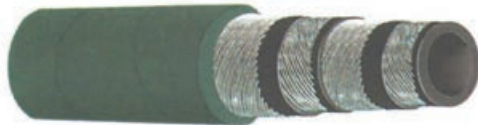

Application

- Designed to convey abrasive sand and shot blast material.

Cover

- Black or green, conductive SBR/NR blend-abrasion and ozone resistant-pin pricked.

Reinforcement

- High tensile textile cords - 4-ply construction.

Tube

- Static conducting natural rubber, offering excellent abrasion resistance.
- Tolerances according to RMA Class 311-A.

Item #	Nominal I.D.	Nominal O.D.	Tube Thickness	Working Pressure	Temperature Range
T750AA075	3/4 in 19.0 mm	1 1/2 in 38 mm	0.236	150 psi 10 bar	-22 to 176 °F
T750AA100	1 in 25 mm	1.89 in 48 mm	0.283	150 psi 10 bar	-22 to 176 °F
T750AA125	1 1/4 in 32 mm	2.17 in 55 mm	0.283	150 psi 10 bar	-22 to 176 °F
T750AA150	1 1/2 in 38 mm	2.36 in 60 mm	0.260	150 psi 10 bar	-22 to 176 °F
T750AA200	2 in 51 mm	2.87 in 73.0 mm	0.260	150 psi 10 bar	-22 to 176 °F
T750AG075	3/4 in 19.0 mm	1 1/2 in 38 mm	0.236	150 psi 10 bar	-22 to 176 °F
T750AG100	1 in 25 mm	1.89 in 48 mm	0.283	150 psi 10 bar	-22 to 176 °F
T750AG125	1 1/4 in 32 mm	2.17 in 55 mm	0.283	150 psi 10 bar	-22 to 176 °F
T750AG150	1 1/2 in 38 mm	2.36 in 60 mm	0.260	150 psi 10 bar	-22 to 176 °F

Plaster and Concrete Hose



Application

- Designed for pumping plaster, grout, and wet cement to placement sites.

Cover

- Black, conductive SBR/NR blend.

Reinforcement

- High tensile textile cords.

Tube

- Black conductive NR.

Branding

- ALFAGOMMA - ITALY T757 - 40 BAR (600 PSI) PLASTER & CONCRETE (in white letters)

Item #	Nominal I.D.	Nominal O.D.	Working Pressure	Temperature Range
T757AA150	1 1/2 in 38 mm	2.13 in 54 mm	600 psi 40 bar	-22 to 176 °F
T757AA200	2 in 51 mm	2.64 in 67 mm	600 psi 40 bar	-22 to 176 °F
T757AA300	3 in 76 mm	4.09 in 104 mm	600 psi 40 bar	-22 to 176 °F
T757AA400	4 in 102 mm	5.12 in 130 mm	600 psi 40 bar	-22 to 176 °F